


## Molded-In-Place Ball Valve

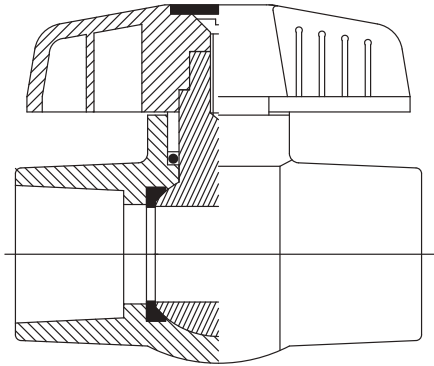

<b>Material:</b>	PVC
<b>Size:</b>	1/2" - 2"
<b>Pressure Rating:</b>	150 psi
<b>Seats:</b>	EPDM
<b>Seals:</b>	EPDM
<b>Connections:</b>	IPS Socket NPT Threaded

ISO 9002 CERTIFIED

### Materials of Construction:


**PVC:** Type 1, Class 12454B, ASTM D1784  
**Seals:** EPDM or FPM  
**Seats:** PTFE

Guide Specification: All molded in place ball valves constructed of the materials indicated. Valve shall be molded-in-place construction wherein the body is injection molded around the ball/stem and seats of the valve. Valve shall be full port design, as manufactured by SIMTECH.

### Features

- Ideal for spas, swimming pools, water wells, irrigation etc.
- Excellent flow characteristics
- Severe shock-loads and misalignment are absorbed by the valve body, not the ball and seat—minimizes uneven wear and leakage



### Pressure/Temperature Graph: Working PSI/Fahrenheit

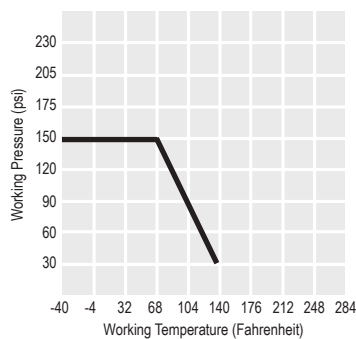


ND	1/2	3/4	1	1 1/4	1 1/2	2
<b>Bore Size</b>	.59	.79	.98	1.26	1.57	1.97
<b>C<sub>v</sub></b>	14	30	53.9	85	152.5	238

## Dimensional Data

Nom. Size	d	d1	d2	D	D1	H	H1	I	L	L1
1/2"	0.57	0.85	0.84	1.50	1.18	2.49	1.75	0.87	2.76	3.27
3/4"	0.79	1.06	1.05	1.93	1.50	3.08	2.12	1.00	3.46	3.74
1"	1.00	1.32	1.31	2.24	1.77	3.73	2.61	1.12	3.94	4.17
1 1/4"	1.14	1.67	1.66	2.48	2.13	3.88	2.64	1.25	3.94	4.49

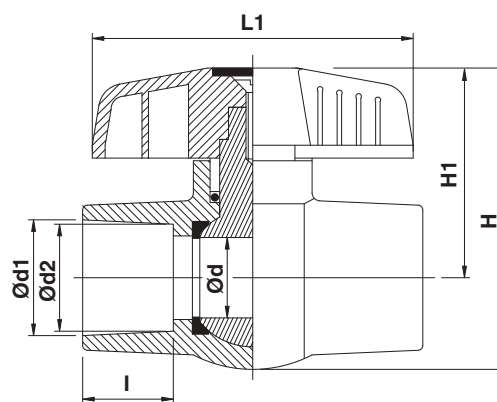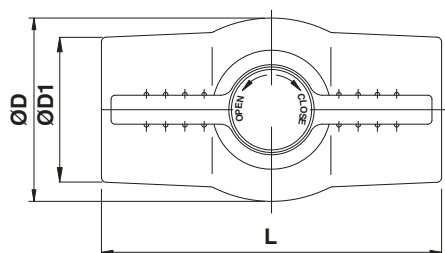


## Pressure Loss—Flow Diagram

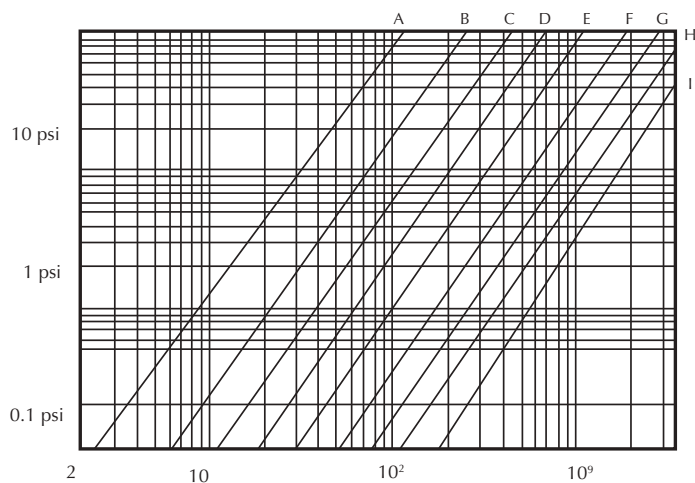

A = 1/2"  
B = 3/4"  
C = 1"  
D = 1 1/4"  
E = 1 1/2"  
F = 2"


Cv is the number of gallons per minute of water at a temperature of 68°F that will flow through a valve with a 1 psi pressure differential at a specified travel.

## Parts Listing

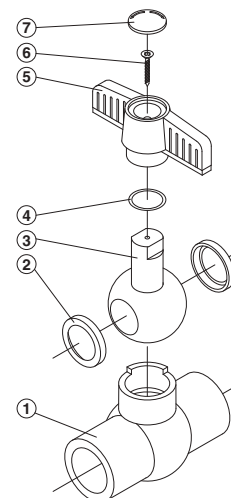

NO.	PART	MATERIAL	Q'TY
1	BODY	PVC, CPVC, ABS	1
2	SEAT SEAL	EPDM, FPM	2
3	BALL	PVC, CPVC, ABS, PP	1
4	O-RING	EPDM, FPM	1
5	HANDLE	ABS	1
6	BOLT	ZINC-PLATED STEEL	1
7	CAP	ABS	1
8	FLANGE	PVC, CPVC, ABS, PP	1

## Two Piece Ball Valve

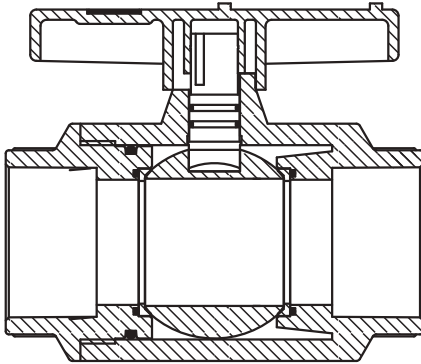

<b>Material:</b>	PVC
<b>Size:</b>	2½" - 4"
<b>Pressure Rating:</b>	150 psi
<b>Seats:</b>	PTFE or EPDM
<b>Seals:</b>	EPDM
<b>Connections:</b>	IPS Socket NPT Threaded

ISO 9002 CERTIFIED

### Materials of Construction:


<b>PVC:</b>	Type 1, Class 12454B, ASTM D1784
<b>CPVC:</b>	Type 4, Class 23447, ASTM D1970
<b>PP:</b>	Class PP 110B76383, ASTM D4101
<b>PVDF:</b>	Type 1, ASTM D3222
<b>Seals:</b>	EPDM or FPM

**Guide Specification:** All Two piece ball valves constructed of the materials indicated. Valve shall be two piece construction wherein the body is injection molded single entry, and the ball is contained by a molded carrier. Valve shall be full port, as manufactured by SIMTECH.

### Features

- Ideal for spas, swimming pools, water wells, irrigation etc.
- Excellent flow characteristics
- Severe shock-loads and misalignment are absorbed by the valve body, not the ball and seat—minimizes uneven wear and leakage
- Excellent low torque design
- Double O-Ring Seal on Stem

### Pressure/Temperature Graph: Working PSI/Fahrenheit

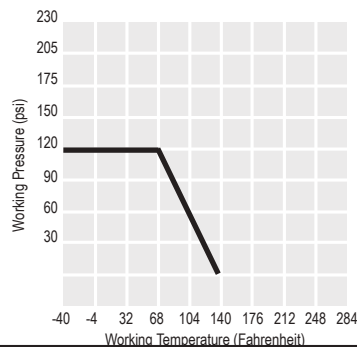



### Flow Rate in Gallons Per Minute

ND	2½	3	4
<b>Bore Size</b>	2.56	3.15	4.00
<b>C<sub>v</sub></b>	367.5	497	720

C<sub>v</sub> is the number of gallons per minute of water at a temperature of 68°F that will flow through a valve with a 1 psi pressure differential at a specified travel.


## Dimensional Data

Nom. Size	d	d1	d2	D	D1	H	I	L	L1
2½"	2.40	2.89	2.87	4.53	3.52	4.57	1.75	7.87	7.09
3"	2.72	3.52	3.49	5.28	4.20	5.06	1.88	8.96	8.82

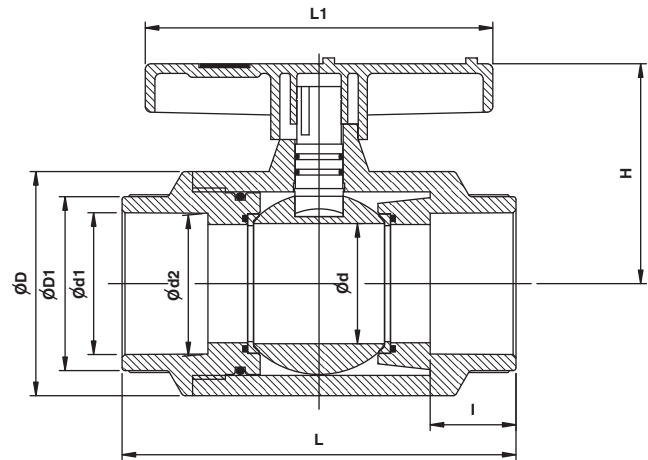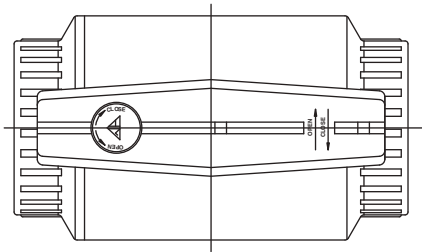

## Parts Listing

NO.	PART	MATERIAL	Q'TY
1	BODY	PVC, CPVC, ABS	1
2	BODY CAP	PVC, CPVC, ABS	1
3	BALL	PVC, CPVC, ABS	1
4	STEM O-RING	EPDM, FPM	2
5	STEM	PVC, CPVC, ABS	1
6	HANDLE	ABS	1

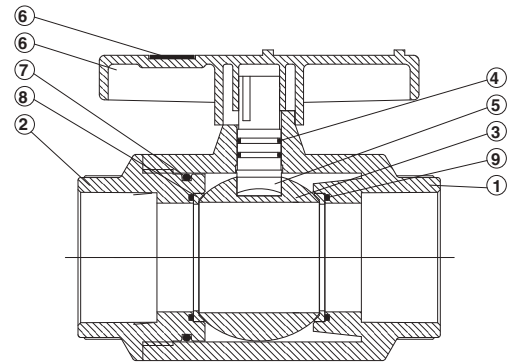

## Pressure Loss—Flow Diagram

